

Product Highlights

- **Full HD Resolution**
High-Definition (Full HD) 2 Megapixel resolution and H.264 compression ensure a high-quality live video feed
- **Power over Ethernet Support**
The DCS-6113 can utilise Power over Ethernet (PoE), allowing them to be easily installed in locations without the need for supplemental power cabling
- **Reliable 24-Hour Surveillance**
Built-in Infrared LED illuminators¹ provide a clear picture at night for dependable 24-hour surveillance



DCS-6112/6113

Full HD Fixed Dome IP Cameras

Key Features

- 1/2.7" 2 Megapixel CMOS progressive sensor
- Real-time H.264, MPEG-4 and Motion JPEG compression
- Full HD resolution (1080p) to capture crisp and clear video
- H.264, MJPEG & MPEG-4 compression codec for distribution and recording of high definition video
- Fixed lens 4.0 mm F1.5
- Max. resolution 1920x1080 at 15 fps, 720p at 30fps
- Four simultaneous streams
- Built-in removable IR-cut filter for day/night surveillance
- Built-in IR LED to support dark environments with 0 lux illumination
- Power over Ethernet (PoE)
- Tamper detection
- Motion detection
- Advanced event management
- ePTZ image manipulation
- Supports multiple access list
- Windows 7/Vista LLTD
- Privacy Mask feature
- Micro SD Card slot
- 2-way audio support
- 1 digital input / 1 digital output
- Analog AV output (NTSC/PAL)
- 3GPP mobile surveillance
- IPv6, 802.1x, QoS, Cos
- Built-in Samba client for NAS
- ONVIF compliant³

Full HD Fixed Dome IP Cameras feature industry leading High-Definition (Full 1080p HD) Megapixel resolution and H.264 compression that enable high-quality video footage to be recorded. They connect to a network to provide high quality live video over the Internet. The DCS-6113 is capable of capturing videos both in dark and light environments due to its built-in IR LEDs and IR-cut (ICR) filter, giving this camera day & night functionality. These cameras also feature a 3-axis gimble that allows for flexible observation area adjustment. With the D-ViewCam 32-channel recording software, these IP cameras provide a complete solution for high-quality live viewing and reliable recording. The cameras also have a built-in MicroSD card slot which can be used for local backup by storing important events on an easily retrievable MicroSD card.

Full HD Surveillance

They deliver Full HD 16:9 widescreen IP video surveillance which provides a high quality vivid video, making it easier to view and monitor footage.

Multiple Video Streams

These cameras support simultaneous streaming of H.264, MPEG-4, and MJPEG video to provide both high-quality and bandwidth efficient compression formats. They supports multicast H.264 streaming, allowing users to view the camera feed by subscribing to a multicast IP address on the network.

Day and Night Functionality

These can be used during and night both. The ICR filter allows the camera to capture crisp colour images during the daytime and detailed grayscale at night, in low-light condition, and even in complete darkness.

Privacy Masking Functionality

Dynamic privacy zones are areas within a camera view that are either private or restricted. These areas are masked. This ensures that the system operator is not able to view or record images within the privacy zones. There are five different masks to choose from.

Tamper-proof

Anti-tamper features make these cameras suitable for tamper-prone locations such as transportation hubs, schools, or correctional facilities. The electronic tamper detection system can sense whenever the camera has been redirected, defocused, blocked or spray-painted and respond promptly with a visible or audible alarm.

Flexible Connectivity

These cameras include input and output ports for connectivity to external devices such as IR sensors, switches, and alarm relays. They also incorporate Power over Ethernet (PoE), allowing it to be easily installed in a variety of locations without the need for supplemental power cabling.

3GPP Mobile Surveillance

Support for 3GPP Mobile Surveillance allows users to view a live video feed from a 3GPP compatible Internet-ready mobile device. This extends monitoring capability, allowing users to check the camera's video feed while on the go without a computer or laptop.

D-ViewCam™ for Management

The included D-Link D-ViewCam™ is sophisticated software which allows users to manage up to 32 network cameras, set e-mail alert notifications, create recording schedules, and use motion detection to directly record important events to a hard drive. D-ViewCam™ also allows users to upload a floor plan to create a realistic layout of the premises where cameras are located, further simplifying the management process.

Viewing Window and ePTZ

Customise the Region of Interest by simply drawing a rectangle on the full view display in the web interface. Being able to digitally move the Region of Interest is an advantage for a fixed camera since it can utilise the virtual auto pan to display vivid details from HD video footage. The viewing window also allows you to utilise the zoom to obtain more in-depth footage.

ONVIF (Open Network Video Interface Forum) Compliant

ONVIF is an open industry forum for the development of a global standard for the interface of IP based physical security products. ONVIF identifies a standard for how IP products within video surveillance and other physical security areas can communicate with each other ensuring interoperability between products regardless of brand. These cameras are ONVIF compliant and therefore interoperable with other manufacturer's products on the same network such as cameras, storage systems, video analytics products and Video Management Systems..



D-Link Assist

Rapid Response Support

If the worst should happen to your network you need the very best support and fast. Downtime costs your business money. D-Link Assist maximises your uptime by solving technical problems quickly and effectively. Our highly trained technicians are on standby around the clock, ensuring that award-winning support is only a phone call away.

With a choice of three affordable service offerings covering all D-Link business products, you can select the package that suits you best:

D-Link Assist Gold - for comprehensive 24-hour support

D-Link Assist Gold is perfect for mission-critical environments where maximum uptime is a high priority. It guarantees four hour around-the-clock response. Cover applies 24/7 for every day of the year including holidays.

D-Link Assist Silver - for prompt same-day assistance

D-Link Assist Silver is designed for 'high availability' businesses that require rapid response within regular working hours. It provides a four hour response service Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist Bronze - for guaranteed response on the next business day

D-Link Assist Bronze is a highly cost-effective support solution for less critical environments. Response is guaranteed within eight business hours Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist can be purchased together with any D-Link business product. So whether you're buying switching, wireless, storage, security or IP Surveillance equipment from D-Link, your peace of mind is guaranteed. D-Link Assist also offers installation and configuration services to get your new hardware working quickly and correctly.

Technical Specifications

Video	
Sensor	• 1/2.7" 2 Megapixel progressive CMOS sensor
Lens	• 77.4° H
Video Compression	• 2
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, and bit rate • Time stamp and text overlays • 3 configurable motion detection windows • 5 configurable privacy mask zones • Configurable white balance, shutter speed, brightness, saturation, contrast, and sharpness
Video Compression	<ul style="list-style-type: none"> • Simultaneous H.264/MPEG-4/MJPEG format compression • H.264/MPEG-4 multicast streaming JPEG for still image
Video Resolution	<ul style="list-style-type: none"> • 1920 x 1080 @ 15 fps • 1280 x 1024 @ 20 fps • 1280 x 720 @ 30 fps • 640 x 480 @ 30 fps • 320 x 240 @ 30 fps • 176 x 144 @ 30 fps
Night Vision	
Built-in IR-cut Filter	• Yes
Built-in IR Illuminator	• Yes (10 m illumination distance)
Minimum Illumination	• 0 lux (with IR illuminator)
Audio	
2-way Audio Support	• Yes
Audio Mute Function	• Yes
Audio Codecs	<ul style="list-style-type: none"> • GSM-AMR speech encoding, 4.75 to 12.2 Kbps • MPEG-4 AAC audio encoding, 16 to 128 Kbps
External Device Interface	
MicroSD Card Slot	• Yes (SDHC)
Digital I/O	• Yes (1/1)
External AV Output	• Yes (NTSC/PAL switch)
Network	
Network Protocols	<ul style="list-style-type: none"> • IPv4, IPv6, TCP/IP, UDP, ICMP, DHCP Client, NTP Client (D-Link), • DNS Client, DDNS Client (D-Link), SMTP Client, FTP Client, • HTTP / HTTPS, Samba Client, PPPoE, UPnP Port Forwarding, • RTP / RTSP / RTCP, IP filtering, 3GPP, LLTD, CoS/QoS, SNMP, IGMP, • 802.1x, ONVIF Compliant
Connectivity	• 1x 10/100BaseT (Ethernet) with PoE
System Management	
Security)	<ul style="list-style-type: none"> • Administrator and user group protection • Password authentication • HTTP and RSTP digest encryption • HTTPS streaming • Remote client access control
System Requirements for Web Interface	<ul style="list-style-type: none"> • Microsoft Windows 7/Vista/XP/2000 • Browser: Internet Explorer 6 or higher, Chrome, Firefox, Safari

Technical Specifications


System Management

Event Management	• 70
Remote Management	•
Mobile Support	•
D-ViewCam™ System Requirements	• 25/25
D-ViewCam™ Software Functions	•

General

Power Input	• 12V DC 1.25 A, 50/60Hz or 802.3af PoE
Max. Power Consumption	• 5.3 watts
Operating Temperature	• 0 to 40°C
Storage Temperature	• -20 to 70°C
Humidity	• 90% non-condensing
Weight	• 472 g
Certifications	• CE (Class A), CE LVD (EN60965-1), FCC (Class A), ICES-003, C-Tick

Dimensions

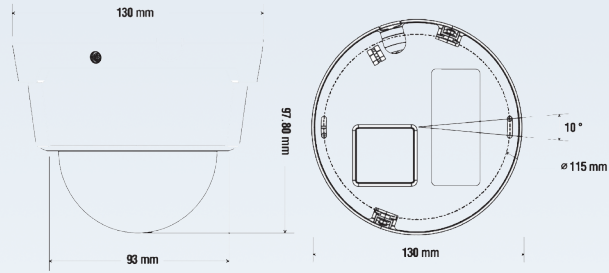

For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., D-LinkHouse, Abbey Road, Park Royal, London, NW10 7BX.
Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners. ©2012 D-Link Corporation. All rights reserved. E&OE.

Updated 20/08/2012